


## Technical Data Sheet

CR Technology offers a wide variety of thermally conductive pads also known as gap fillers. These materials are available in both silicone and non-silicone formulations.

EVERTHERM pads offer an endless range of thermal conductivity, softness and thickness, are naturally tacky and can be cut to any size or shape for easy installation

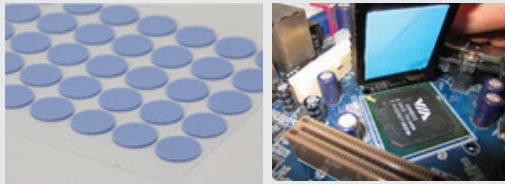

## Material Properties

- High thermal conductivity
- Excellent flame retardant
- Good electrical insulation performance
- Good flexibility and high compression ratio

## Applications

- ✓ Semiconductor heat sink
- ✓ Electric Vehicle (EV) Batteries
- ✓ Communication & power devices & modules
- ✓ LED lighting equipment
- ✓ Electronic components like: LEDs, CPUs, MOS • Mobiles, Laptops, Tablets



# EVSF600D

|                                 |                         |            |
|---------------------------------|-------------------------|------------|
| Color                           | Dark Grey               | Visual     |
| Thickness                       | 0.15 - 15.0mm           | ASTM D374  |
| Specific Gravity                | 2.3g/cm <sup>3</sup>    | ASTM D792  |
| Thermal Conductivity            | 4.0 W/m.k               | ASTM D5470 |
| Hardness(Shore oo)              | 30~90                   | ASTM D2240 |
| Normal Hardness(Shore00)        | 40/60±5                 | ASTM D2240 |
| Elongation                      | 50%                     | ASTM D412  |
| Tensile Strength                | 40psi                   | ASTM D412  |
| Dielectric Breakdown Voltage@AC | >8000V/mm               | ASTM D149  |
| Flammability Rating             | UL94 V-0                | E355606    |
| Volume Resistivity              | 1*10 <sup>13</sup> Ω.cm | ASTM D257  |
| Operating Temperature           | -50 ~ 200               | ***        |
| Thermal Resistance(1mm,@30psi)  | 0.7 *in <sup>2</sup> /W | ASTM D5470 |
| Compression Ratio(1mm,@30psi)   | 40%                     | ***        |
| Dielectric Constant@1 MHz       | 6.0                     | ASTM D150  |
| RoHS                            | PASS                    | IEC 62321  |
| Halogen                         | PASS                    | EN14582    |
| REACH                           | PASS                    | EN14372    |

Test fixtures using ASTM D5470. Recorded values include interface thermal resistance. These values are for reference only. The actual application performance is directly related to the applied surface roughness, flatness and pressure.

## CR Technology, Inc

📍 55 Chase St. Methuen,  
Massachusetts 01844

✉ sales@crtechinc.com

☎ 978.681.5300

**Note:** The information provided herein is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical. Therefore, these recommendations and data are for reference only and not as a product warranty.