


## Technical Data Sheet

EVSF100-P is a tough, wear-resistant, tensile-strength, thermally conductive silicone pad that is used to fill two pressure-sensitive or vibrating interfaces to allow air to escape from the interface and improve thermal conductivity. The product is self-adhesive and can be cut by CRT into various shapes for easy assembly. Thermal conductivity is 1.0W/MK.

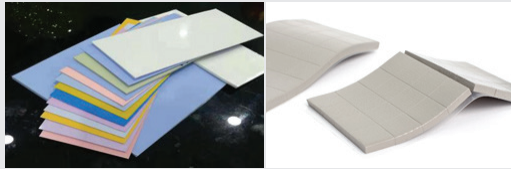

### Material Properties

- High thermal conductivity
- Excellent flame retardant
- Good electrical insulation performance
- Good flexibility and high compression ratio
- Adhesive backed, can be cut to and shape

### Applications

- ✓ Semiconductor heat sink
- ✓ Electric Vehicle (EV) Batteries
- ✓ Communication & power devices & modules
- ✓ LED lighting equipment
- ✓ Electronic components like: LEDs, CPUs, MOS • Mobiles, Laptops, Tablets



## EVSF100-P

Color	White	Visual
Thickness	0.3 ~ 10.0mm	ASTM D374
Specific Gravity	1.7g/cc	ASTM D792
Thermal Conductivity	1.0 W/m-K	ASTM D5470
Hardness (Shore OO)	50~75。	ASTM D2240
/Elongation	200%	ASTM D412
Tensile Strength	150psi	ASTM D412
Electrical Strength	>200VAC/mil	ASTM D149
UL Flammability Rating	UL94 V-0	
Volume resistivity	7*10 <sup>13</sup> Ω.cm	ASTM D257
Operating Temperature	-50 ~ 200°C	--
Thermal Resistance(1mm,@40psi)	1.02°C*in <sup>2</sup> /W	ASTM D5470
Compression Ratio(1mm,@40psi)	20%	--
Dielectric Constant MHz	NA	ASTM D150
RoHS	PASS	IEC 62321
Halogen	PASS	EN14582
REACH	PASS	EN14372

Test fixtures using ASTM D5470. Recorded values include interface thermal resistance. These values are for reference only. The actual application performance is directly related to the applied surface roughness, flatness and pressure.

## CR Technology, Inc

📍 55 Chase St. Methuen,  
Massachusetts 01844

✉ sales@crtechinc.com

☎ 978.681.5300

**Note:** The information provided herein is accurate at time of publication. It is the responsibility of the end-user to confirm compliance to their application. All test data is typical. Therefore, these recommendations and data are for reference only and not as a product warranty.